


Blue-White

Industries, Ltd.

FLEXFLO® Peristaltic Metering Pumps

Dimensions:

	DIM 'A'	DIM 'B'	DIM 'C'	TANK SHIP WT.
7 GALLON TANK	20.00 (30)	18.50 (47)	18.50 (47)	14 LB. (6.3 Kg)
15 GALLON TANK	17.25 (44)	20.00 (51)	20.00 (51)	22 LB. (10 Kg)
30 GALLON TANK	27.50 (69)	20.00 (51)	20.00 (51)	28 LB. (12.7 Kg)

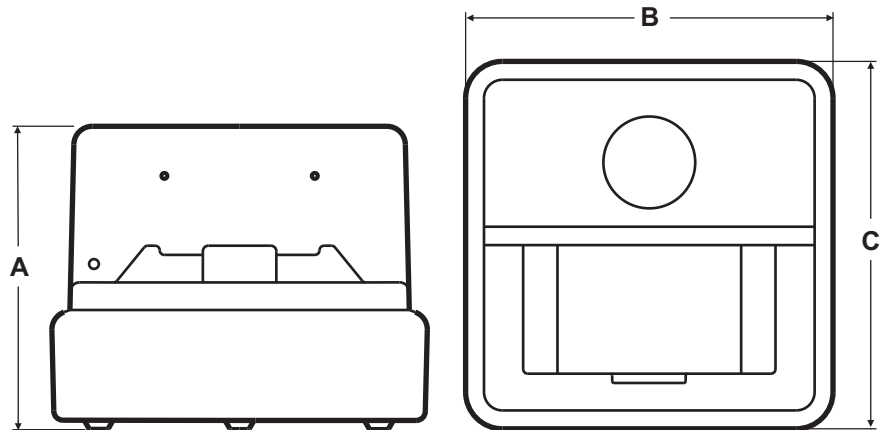

DIMENSIONS = INCH (CM)

Complete System Model Number Matrix:

MODEL A1N - - T15

Maximum Motor RPM

0 = 14 RPM
1 = 30 RPM
2 = 45 RPM
3 = 60 RPM

Power Supply

0 = 115V60Hz
1 = 220V50Hz
2 = 230V60Hz
8 = 240V50Hz

Output Control

C = Analog timer, 5 sec. Cycle - 100% duty
A = Analog timer, 60 sec. Cycle - 100% duty
S = Analog timer, 60 sec. Cycle - 10% duty
V = Digital speed control with external input
F = Analog speed control
E = Digital batch timer with external input
Z = Proportional feed system - JBox/Cord
X = No output control - fixed feed rate

Miscellaneous Options (not required)

1 = T140-6V injector replaces A-014HD-6A
2 = C-340V footvalve replaces C-342-6 strainer
5 = A-014HDK-6A injector PVDF
T7 = 7 gallon chemical tank system
T15 = 15 gallon chemical tank system
T30 = 30 gallon chemical tank system

Tubing Connection Type

T = Compression tube nuts
Q = Push-on quick connect

Pump Tube Size and Material

1 = 1/4" OD Tygothane
2 = 3/8" OD Tygothane
3 = 7/16" OD Tygothane
4 = 1/4" OD Norprene
5 = 5/16" OD Viton
6 = 3/8" OD Norprene
7 = 7/16" OD Norprene

Tank Only Model Number:

STAR3-7 = 7 gallon tank only
STAR3-15 = 15 gallon tank only
STAR3-30 = 30 gallon tank only